
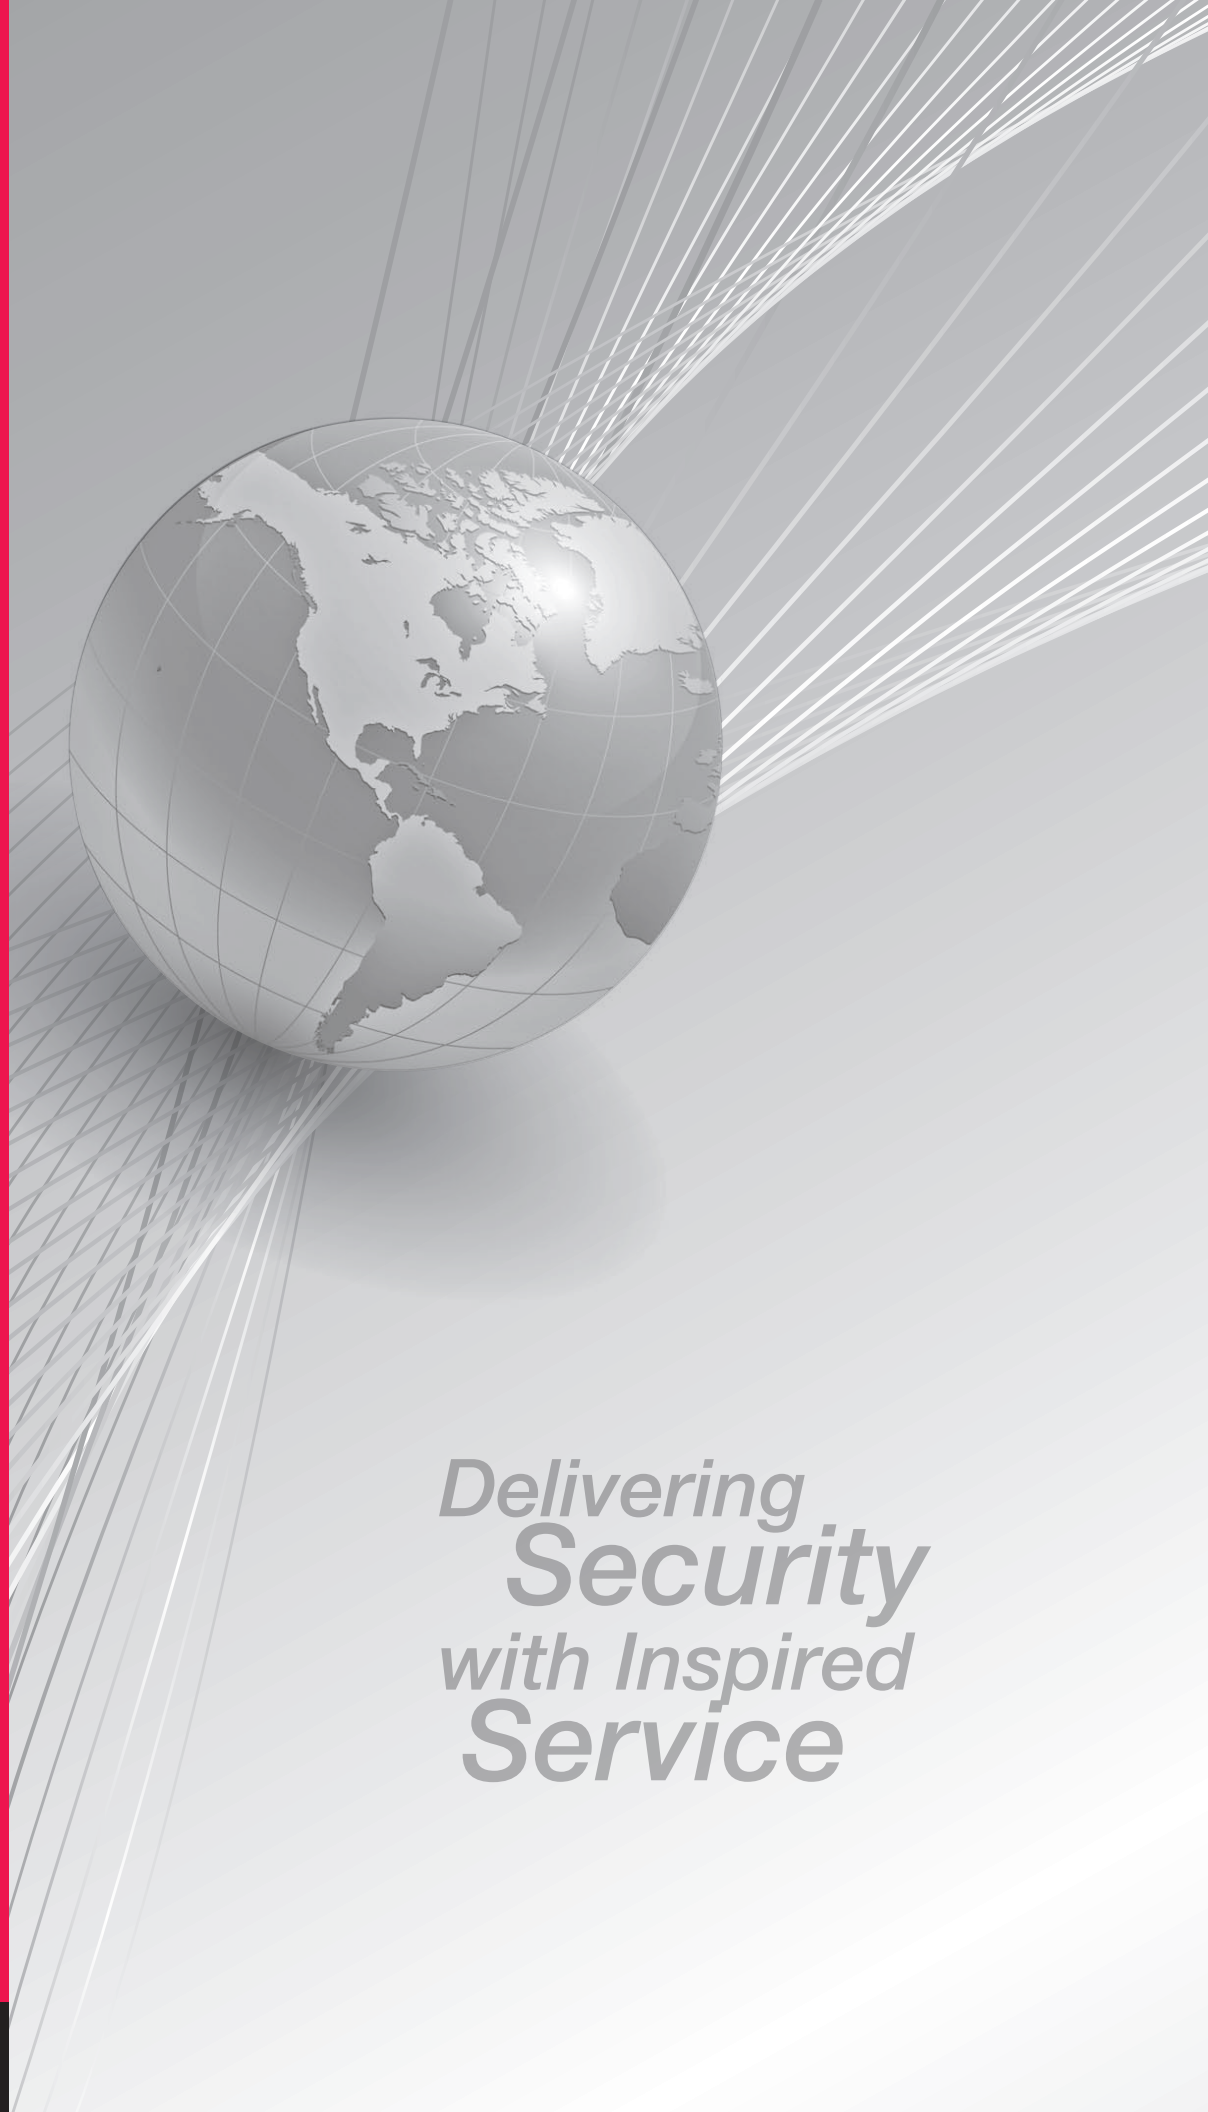


U.L. Listed  
High  
Security  
Safes



*Delivering  
Security  
with Inspired  
Service*


# High Security Safes

## High Security Safes

With more than 105 years in the industry, Rolland Safe & Lock Company has developed a range of high security safes to withstand the most concentrated attacks by burglars today.

This series of high security safes offer a unique defense barrier utilizing a composite construction of proprietary materials to resist the most sophisticated burglary attacks.

The Fortress and Treasury series safes pass the most rigorous testing standards at the Underwriters Laboratories facility. There are three U.L. ratings for these high security safes – all have not only received a tool resistant burglary rating, but also have a two hour, 350° factory fire test certification (with testing at temperatures as high as 1850°) offering excellent protection for all your valuables against burglary and intense fire.

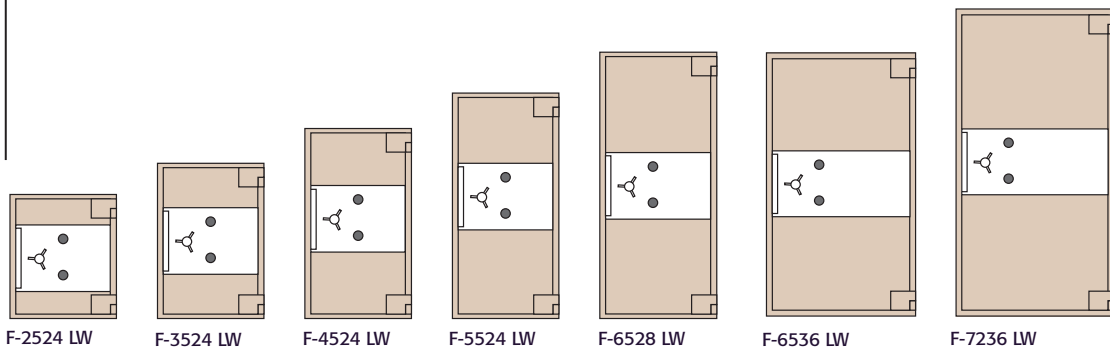

Model	Interior H x W x D (in)	Exterior H x W x D (in)	Weight (lbs)	Capacity (cu ft)	Shelves
<b>F-2524 LW</b>	25 x 24 x 20	29 x 28 x 28	1,295	6.9	1
<b>F-3524 LW</b>	35 x 24 x 20	39 x 28 x 28	1,605	9.7	2
<b>F-4524 LW</b>	45 x 24 x 20	49 x 28 x 28	1,930	12.5	3
<b>F-5524 LW</b>	55 x 24 x 20	59 x 28 x 28	2,248	15.3	4
<b>F-6528 LW</b>	65 x 28 x 20	69 x 32 x 28	2,835	21.1	5
<b>F-6536 LW</b>	65 x 36 x 22	69 x 40 x 30	3,420	29.7	5
<b>F-7236 LW</b>	72 x 36 x 26	76 x 40 x 34	3,615	39	5

## International Fortress TL30 LW

The International Fortress U.L. listed F-TL30 LW, six-sided composite construction offers a revolutionary new barrier material incorporating a steel and ceramic matrix. The ceramic matrix is anchored by a "Z" bar connection system that makes the inner and outer layers of steel as well as the composite material as one. By using this unique construction, the safe achieves a high degree of burglary protection while being relatively light in weight.

- Door - designed to withstand most commonly used attack tools
- 1 1/2" diameter chromed high tensile steel bolts
- Relocking systems protects all boltwork
- Bolt detent automatically extends bolts when door is closed
- Heavy duty locking shelves
- Intumescent gasket expands 10x its size to seal heat from interior of safe
- 2 U.L. listed Group 2M combination locks
- 2 Hour fire resistant factory rating




## International Fortress TL30x6 LW

The International Fortress U.L. listed FX-TL30x6 LW, six-sided composite construction offers a revolutionary new barrier material incorporating a steel and ceramic matrix on all six sides of the safe. The ceramic matrix is anchored by a "Z" bar connection system that makes the inner and outer layers of steel as well as the composite material as one. By utilizing this unique construction, the safe achieves a high degree of burglary protection while being relatively light in weight.

- 1 1/2" diameter chromed high tensile steel bolts
- Relocking systems protects all boltwork
- Bolt detent automatically extends bolts when door is closed
- Heavy duty locking shelves
- Intumescent gasket expands 10x its size to seal heat from interior of safe
- 2 U.L. listed Group 2M combination locks
- Optional keylocks or electronic locks can be added
- 2 Hour fire resistant factory rating

- Door and Body - designed to withstand most commonly used tools on all six sides

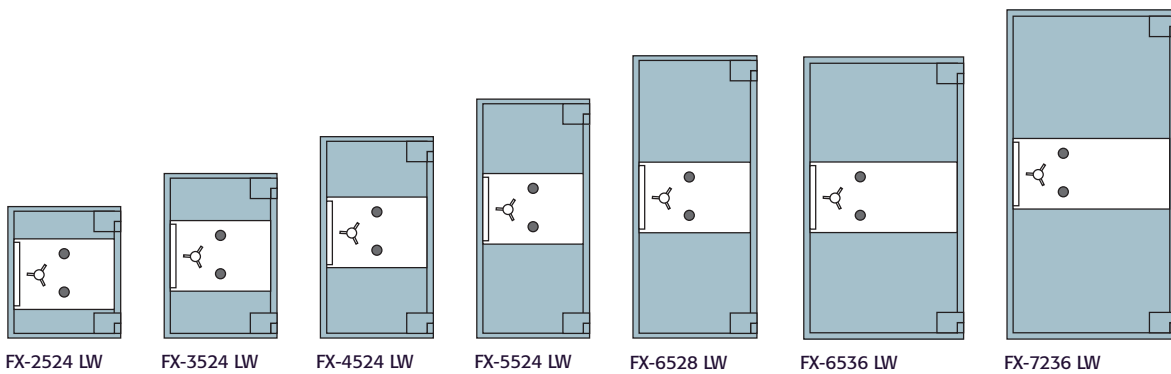

Model	Interior H x W x D (in)	Exterior H x W x D (in)	Weight (lbs)	Capacity (cu ft)	Shelves
<b>FX-2524 LW</b>	25 x 24 x 20	31 x 30 x 29	1,620	6.9	1
<b>FX-3524 LW</b>	35 x 24 x 20	41 x 30 x 29	1,905	9.7	2
<b>FX-4524 LW</b>	45 x 24 x 20	51 x 30 x 29	2,425	12.5	3
<b>FX-5524 LW</b>	55 x 24 x 20	61 x 30 x 29	2,800	15.3	4
<b>FX-6528 LW</b>	65 x 28 x 20	71 x 34 x 29	3,800	21.1	5
<b>FX-6536 LW</b>	65 x 36 x 22	71 x 42 x 31	4,250	29.7	5
<b>FX-7236 LW</b>	72 x 36 x 26	78 x 42 x 35	4,890	39	5




**NEW!**

## Rolland Treasury TRTL30x6 LW

The new Rolland Treasury, U.L. listed, TRTL30x6 LW high security safe is constructed of outer and inner steel plates, electrically welded, enclosed in our proprietary barrier material consisting of high strength steel, aluminum, and copper alloys. This high security safe provides multi-layer protection designed to withstand formidable burglary attacks attempted by the most sophisticated equipment utilized today.

- Door and Body - 6" thick safe door with a 3 1/2" total safe body thickness made of proprietary material

- Hinge side protected by bar of stainless steel bolts that fit into reinforced bolt chambers
- Massive 1 1/2" diameter stainless steel, three-way bolt mechanism
- Large tempered glass relocker plate protects vital locking mechanism
- Bolt detent automatically extends bolts when door is closed
- Intumescent gasket expands 10x its size to seal heat from interior of safe
- 2 U.L. listed Group 2M or Group 1 combination lock with spyproof dial
- 2 Hour fire resistant factory rating
- Locking shelves

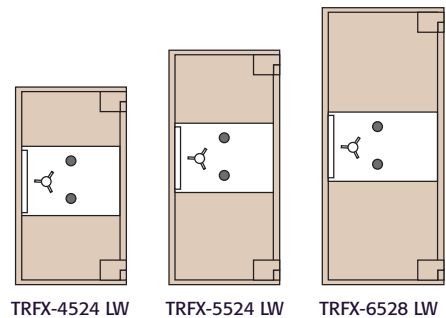

TRFX-4524 LW

TRFX-5524 LW

TRFX-6528 LW

Model	Interior H x W x D (in)	Exterior H x W x D (in)	Weight (lbs)	Capacity (cu ft)	Shelves
<b>TRFX-4524 LW</b>	45 x 24 x 20	52 x 31 x 30	2,895	12.5	3
<b>TRFX-5524 LW</b>	55 x 24 x 20	62 x 31 x 30	3,270	15.3	4
<b>TRFX-6528 LW</b>	65 x 28 x 20	72 x 35 x 30	4,270	21.1	5

Additional sizes available through custom order only.

## **Nationwide Safe & Locksmith Services**

### **Safe Services**

24/7 Phone diagnostics  
24/7 Emergency services and repairs  
Safe, vault, and cash management  
Hinge, handle and bolt work repair, alignment and adjustment  
Drilling, leveling, moving and storage  
Electronic and mechanical lock installation, service and repair  
Preventive maintenance, refurbishing & refinishing  
Safe moving, rental, and repair

### **Locksmith Services**

24/7 Phone diagnostics/Customer service  
24/7 Emergency opening, installation & repair  
One point of contact  
ADA Specialists  
New construction design  
New hardware installation  
Standardization of key systems  
Back office & database management of the following:  
IC & restricted keyway lock rekeying and installation  
Master key systems and record key maintenance  
Rekeying, lockout & combination changes  
Key duplication, lock drilling & picking of cylinders  
Exit device and panic bar repair and installation  
Access control installation and repair  
Door frame adjustment and repair

**24 Hours a Day, 365 Days a Year**  
**Contact us at 800.225.2984 or**  
**[serviceorders@rslc.net](mailto:serviceorders@rslc.net)**



3140 Towerwood Dr. Dallas, TX 75234  
972.243.3711 Main 972.241.7669 Fax  
800.225.2984 Toll Free  
TPSB# B13643

1926 Airline Dr. Metairie, LA 70001  
504.835.7233 Main 504.837.5868 Fax  
800.873.8898 Toll Free  
#F980

[www.rslc.net](http://www.rslc.net)